



选型指南




上海華通電氣有限公司 SHANGHAI HUATONG ELECTRICITY CO.,LTD.

第三部分 隔离开关



SG1系列隔离开关

SG1系列隔离开关为新型更新产品，主要结构特点获多项国家专利。体积小，并联双断点，速通、速断，隔离距离大，直接显示触头分合状态；断开位置设有防止闭合的挂锁装置，安全可靠。

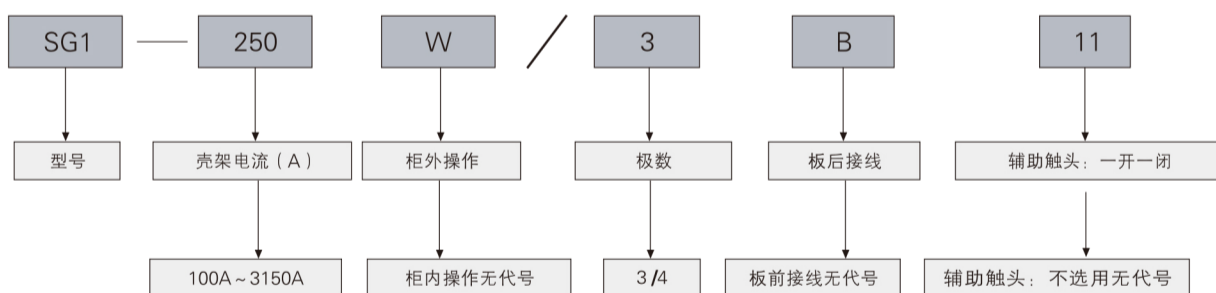

主要技术参数:

型号	额定工作电压Ue(V)	额定工作电流Ie(A)	操作循环次数		额定短时耐受电流有效值Icw(kA/1s)	额定短路接通能力Icm峰值(kA)	额定绝缘电压Ui(V)	额定冲击耐受电压Uimp(kV)
			空载	有载				
SG1-100	400	100	8500	1500	7	20	800	8
	690	50						
SG1-125	400	125	7000	1000	10	40	800	8
	690	63						
SG1-160	400	160	7000	1000	10	40	800	8
	690	80						
SG1-200	400	200	7000	1000	10	40	800	8
	690	100						
SG1-250	400	250	4000	1000	20	40	800	12
	690	125						
SG1-315	400	315	4000	1000	20	40	800	12
	690	160						
SG1-400	400	400	4000	1000	20	40	800	12
	690	200						
SG1-500	400	500	4000	1000	20	40	800	12
	690	250						
SG1-630	400	630	4000	1000	20	40	800	12
	690	315						
SG1-800	400	800	2500	500	50	70	800	12
	690	400						
SG1-1000	400	1000	2500	500	50	70	800	12
	690	500						
SG1-1250	400	1250	2500	500	50	70	800	12
	690	630						
SG1-1600	400	1600	2500	500	50	70	800	12
	690	800						
SG1-2000	400	2000	2500	500	50	70	800	12
	690	1000						
SG1-2500	400	2500	2500	500	50	70	800	12
	690	1250						
SG1-3150	400	3150	1500	500	60	85	800	12
	690	1600						

注: 详细资料见本公司SG1系列样本。